

Product	Group A	Group B	Wood
Atmosfera® Analog	●		○
Atmosfera® Contour		●	
Atmosfera® Standard - Curved Fin**		●	
Atmosfera® Standard - Straight Fin**	●		○
SoftFold®	●		○
SoftGrid®	●		○
SoftPlanes®	●		○
Soft Sound® Backer Panels & Inserts	●		○
SoundAngle®	●		○
SoundBar	●		○
SoundEdge®	●		○
SoundStar®	●		○
TriSoft®	●		○

- Standard
- Optional Colors - Upcharge for Finish

Color Group	Thickness	Fire Rating
Color Group A	12 mm	FR - Class A
Color Group B	9 mm	FR - Class A
Wood	12 mm	FR - Class A

*See Soft Sound® specification for detailed information

**Straight or Curved in plan view

Available Colors:

Material Thickness: 12 mm
Fire Rating: Class A



Snow



White




Marble



Heather Gray



Graphite

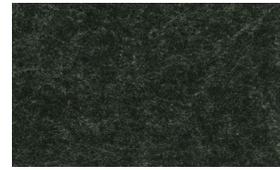

Carbon




Onyx




Sand



Taupe

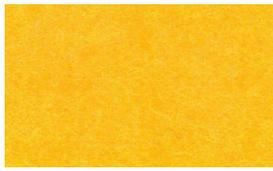

Lemon

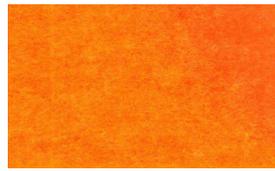


Tangerine



Apple



Whisper

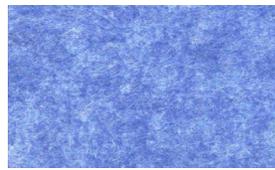

Sky Blue



Denim



Kiwi

Product Variances | Variation in fiber and color and patterning may occur.

Available Colors:

Material Thickness: 9 mm
Fire Rating: Class A



White




Frost



Light Beige



Light Gray

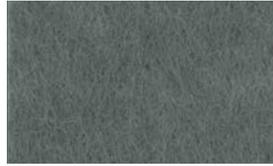

Smoke



Slate Gray



Charcoal



Black



Desert



Purple



Navy Blue



Canary Yellow



Lime Green



Bright Orange



Red

* Former Orange, Yellow, Beige, Light Blue, Dark Gray, and Blue Gray have been discontinued.

Product Variances | Variation in fiber and color and patterning may occur.



White Oak



Gray Ash



Golden Oak



American Walnut




Oak



Charred Ash




Charred Oak

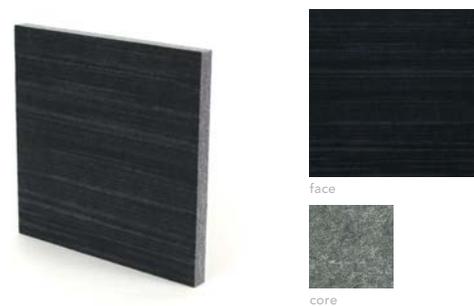

Ebony

Product Variances | Variation in fiber and color and patterning may occur.



A R K T U R A

ARKTURA LLC
18225 S. Figueroa
Gardena, CA 90248

1.310.532.1050
info@arktura.com
www.arktura.com

ARKTURA Soft Sound® - COLOR GROUP A

Fire Rating: ASTM E84-14 Class A

Sound Absorption: ASTM C423-90A for raw material

12mm:

NRC .35 (no air gap)

NRC .70 (50mm air gap)

NRC .80 (100mm air gap)

NRC .90 (150mm air gap)

*results for raw material, see TrueNRC™ Testing Brochure for system results

Environmentally Sustainable & Beneficial:

- Recyclable: Soft Sound® products are 100% PET
- Low VOC product: no added urea formaldehyde.

Cleaning & Handling:


- Vacuum the surface of the material to remove dust accumulation.
- If a wet spill should occur, blot up the liquid as soon as possible with a dry cloth to avoid absorption.
- Soiled areas may be spot cleaned with warm water or a mild, dry cleaning solvent. Avoid excessive amounts of water and aggressive rubbing as this can change the surface appearance of the material.
- Ensure adequate ventilation if the product is likely to be subject to excessive moisture.

Project Conditions

- All wet work must be complete and dry prior to installation. Avoid direct exposure Soft Sound® to sunlight or warranty will be void. Installation shall be carried out where the temperature is between 40 degrees F and 90 degrees F. These temperature conditions must be maintained throughout the life of the product or warranty will be void.

Soft Sound® Material Finish

- Soft Sound® acoustical material is produced by felting 100% PET plastic. In some colors a beautiful heathering pattern becomes visible as a result of this traditional manufacturing process, and will result in natural variations in color and patterns from batch to batch and sheet to sheet.



A R K T U R A

ARKTURA LLC
18225 S. Figueroa
Gardena, CA 90248

1.310.532.1050
info@arktura.com
www.arktura.com

ARKTURA Soft Sound® - COLOR GROUP B

Fire Rating: ASTM E84 Class A / CAN ULC S102

Sound Absorption: ASTM E795 for raw material

9mm:

NRC .75 (50mm air gap)

*results for raw material, see TrueNRC™ Testing Brochure for system results

Environmentally Sustainable & Beneficial:

- Recyclable: Soft Sound® products are 100% PET
- Low VOC product: no added urea formaldehyde.

Cleaning & Handling:

- Vacuum the surface of the material to remove dust accumulation.
- If a wet spill should occur, blot up the liquid as soon as possible with a dry cloth to avoid absorption.
- Soiled areas may be spot cleaned with warm water or a mild, dry cleaning solvent. Avoid excessive amounts of water and aggressive rubbing as this can change the surface appearance of the material.
- Ensure adequate ventilation if the product is likely to be subject to excessive moisture.

Project Conditions

- All wet work must be complete and dry prior to installation. Avoid direct exposure Soft Sound® to sunlight or warranty will be void. Installation shall be carried out where the temperature is between 40 degrees F and 90 degrees F. These temperature conditions must be maintained throughout the life of the product or warranty will be void.

Soft Sound® Material Finish

- Soft Sound® acoustical material is produced by felting 100% PET plastic. In some colors a beautiful heathering pattern becomes visible as a result of this traditional manufacturing process, and will result in natural variations in color and patterns from batch to batch and sheet to sheet.